


Disponible seulement en anglais

RS22P INSTALLATION INSTRUCTIONS—DROP CEILING APPLICATION

1. Disconnect any DC power supply before wiring remote fixture.
2. Cut 15.3 cm (6") diameter hole in ceiling tile.
3. Insert backbox pot through hole.
Insert backbox pot support brackets into "T" shaped slots on both sides.
Slide support brackets down until they touch ceiling tile.
Insert machine screws horizontally into brackets.
4. Punch out desired 3/4" knock-out on back box pot and feed BX cable into pot.
Make electrical connections.
5. Line up RS22 front mounting holes with holes in back box pot and insert self-tapping screws.

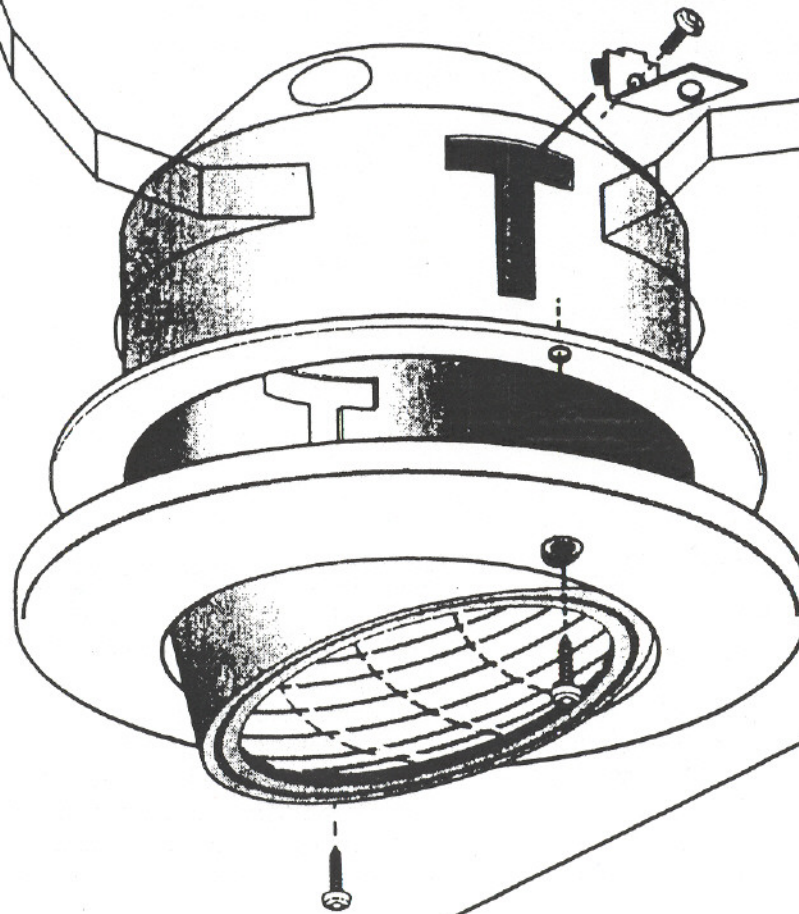

Lumacell Inc. 120 Nashdene Road, Scarborough, Ontario M1V 2W3
Telephone: (416) 292-9782 • FAX: (416) 299-0024

750.0678 Rev A