

SIGNATURE Recessed Pot-Lites

Decorative Recessed Fixture



Features

- Durable, powder-coated or electro plated die-cast construction
- Maintenance-free, sealed nickel cadmium battery has a life expectancy of five years
- Quick disconnect feature for easy trim installation; easy to access for maintenance
- Fully automatic, solid-state Pulse-Guard charger with low voltage battery disconnect, brownout protection, integral test switch and long-life LED AC-On pilot lights
- Charger is designed for NiCad continuous trickle charge and is reverse polarity protected
- 120/347Vac standard input
- CSA C22.2 No. 141 certified



Typical Specification

Recessed heads and housings:

The contractor will supply and install Lumacell Signature Collection™ internally self-powered series. The unit will have a dual input 120/347Vac 60Hz. Recessed heads will be constructed of a durable powder coated, or electro plated die cast aluminum construction and use MR16 halogen light sources and a 5 year NiCad battery.

The recessed head will be adjustable to 0-90° vertical and 0-350° horizontal angle. The light source will be 6 volts 6 watts MR16 halogen narrow beam or otherwise specified. The unit shall be equipped with a sealed, high-temperature Ni-Cad battery which will supply the emergency lamp for minimum 30 minutes of illumination in case of power failure.

The unit shall be Lumacell model:

_____.

In the same family...



SIGNATURE RSTH


Remote Fixture p. 186 - 187

Project/Location		Date
Contractor		Prepared by
LUMACELL Model		



SIGNATURE SERIES

Dimensions

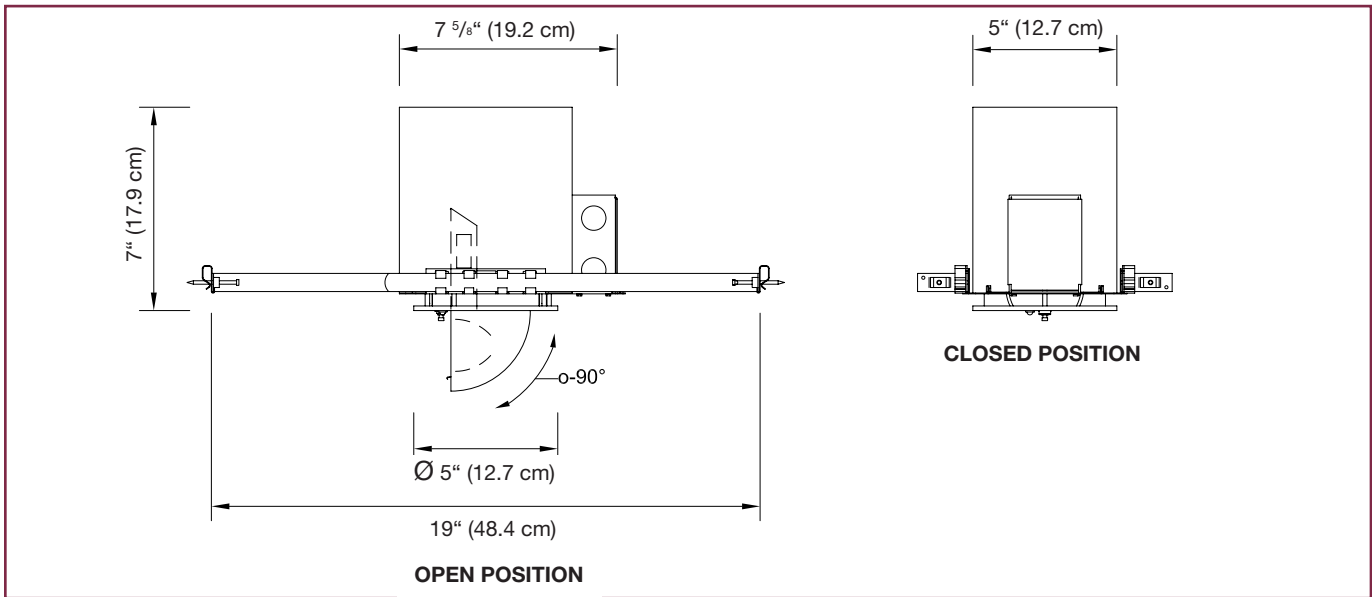

Power Consumption and Unit Rating

Model	AC Specs		Wattage Capacity				
			30min	1h00	1h30	2h00	4h00
RSTH24	120/347 Vac	0.08/0.03 Amp	10	-	6	-	-

Replacement Lamps

Ordering Code	Lamp Type	Voltage-Wattage
580.0074-L	MR16	6V-6W
580.0079-L	MR16	6V-10W

Ordering Information

Series	Colour	Standard	Lamp Wattage
RSTH24	WH = white	SP-C = self-powered	Blank = 6 watts, MR16 -10 = 10 watts, MR16
	BK = black		
	BN = brushed nickel		
	CH = chrome		
	PB = polished brass		

EXAMPLE: RSTH24WHSP-C