

# MINI-PHANTOM Remote Fixture

## For AC power generator



### Features

- Easy to retrofit in finished walls: the unit slides in through an 8.25-in by 5.75-in hole
- No back-box needed to pre-install
- Fully automatic operation: the unit door opens upon supply with AC power and closes at the end of power back-up
- Output: 12Vac with up to 100 watts of power
- Direct connection to 120 or 347Vac power generators
- Emergency lights: MR16 halogen lamps; power range from 12 to 50 Watts
- Certification: CSA C22.2 N°50



Made in Canada



### Typical Specification

Supply and install Lumacell Series Mini-Phantom. The unit shall be designed to be completely concealed in walls with a cavity. The equipment shall consist of a metal housing containing two modules joined by a flexible bracket and electric conduit. One module contains the power transformer and electrical connection box; the other module contains the emergency lights installed on the back of a door able to rotate several turns of 360°. The unit equipment shall be completely concealed in the wall, after the installation through a rectangular opening not larger than 8.25-in by 5.75-in.

In stand-by mode, the only visible parts of the unit shall be the off-white flat door and trim plate that can be customized on site with paint or other suitable wall

covering. Upon AC power supply the unit will expose the emergency heads by rotating its door 180° and then will power the lamps. At the end of the AC power, the lamps will turn off and the unit will retract the heads by rotating the door 180° in the same direction.

The unit shall not require the presence of AC power in order to close the door and conceal the lights. The door of the unit shall be easy to force-turn (open or close) by hand. The light source shall be 12V MR16 halogen lamps of specified wattage and light output.

The remote unit shall be the Lumacell model:  
MPG \_\_\_\_\_.

### In the same family...



MINI-PHANTOM


Battery Units p. 116 - 117

Project / Location		Date
Contractor		Prepared by
LUMACELL Model		



# MINI-PHANTOM

## Dimensions

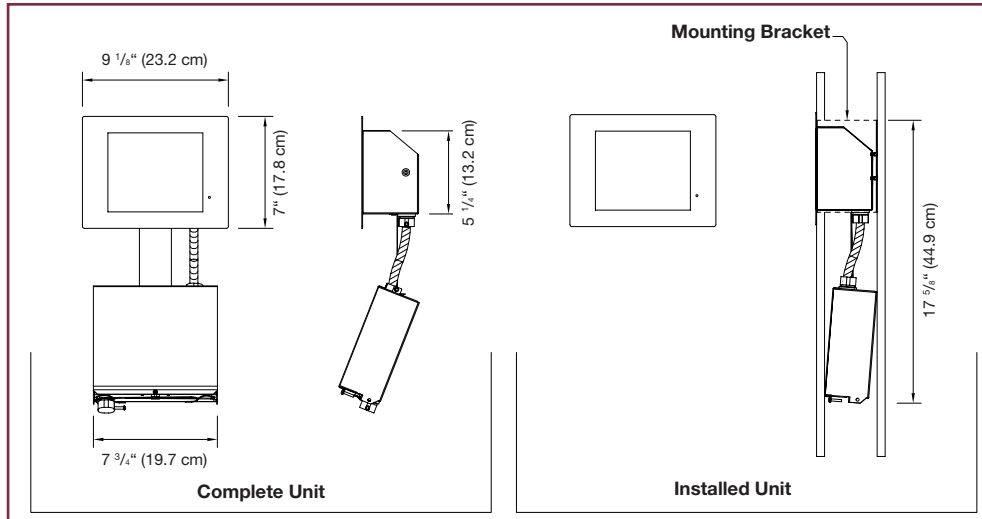

## Replacement Lamps

Model	Lamp Type	Voltage-Wattage
580.0080-L	MR16 12W Flood	12V-12W
580.0064-L	MR16 20W Flood	12V-20W
580.0083-L	MR16 35W Flood	12V-35W
580.0076-L	MR16 50W Flood	12V-50W
580.0068-L	MR16 IR * 20W Flood	12V-20W
580.0090-L	MR16 IR * 35W Flood	12V-35W
580.0089-L	MR16 IR * 50W Flood	12V-50W

\* High-output (H).

See the complete list p. 196 to 199.

## Ordering Information

Series	Unit Capacity	Lamp Wattage	AC Voltage
<b>MP</b>	<b>G</b> = Remote AC generator, max. 100W	<b>12W</b> = 2x 12 watts MR16	<b>Blank</b> = 120Vac
		<b>20W</b> = 2x 20 watts MR16	<b>ZC</b> = 277Vac
		<b>35W</b> = 2x 35 watts MR16	<b>ZD</b> = 347Vac
		<b>50W</b> = 2x 50 watts MR16	
		<b>20WH</b> = 2x 20 watts MR16, High output	
		<b>35WH</b> = 2x 35 watts MR16, High output	
		<b>50WH</b> = 2x 50 watts MR16, High output	

**EXAMPLE: MPG35WH**