


RS*WP / RS*WPRB/ RS*QWPBH

Weatherproof Remote Fixture Series



RS*WP

Dimensions

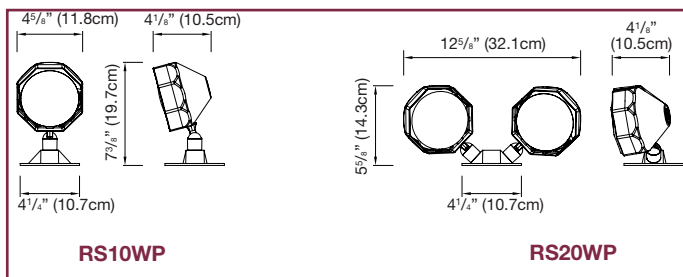

Features

- PAR 36, surface-mounted industrial remote fixtures
- Available in single, double or triple head fixtures
- Durable thermoplastic construction suitable for industrial or high abuse areas
- CSA certified to C22.2 N°50.

Replacement Lamps

Model	Lamp Type	Voltage-Wattage
570.0016-L	Tungsten	6V-9W
570.0025-L	Tungsten	12V-9W
570.0079-L	Tungsten	24V-9W

See the complete list p. 196 to 199.

Wire Guards

460.0035-L	Wall Mount (RS10WP)
460.0082-L	Wall Mount (RS20WP)

Ordering Information

Series	# of Heads	Voltage/Wattage/Lamp Type	Colour	Options
RS= PAR 36	10= single head	WP6V9W = 6V-9W, tungsten, wedge base	Blank = black	Blank = no options
	20= double head	WP6V_W = 6V-18 or 25W, tungsten, D.C.B.	WH = factory white	TC = teflon coated lens
		WP12V_W = 12V-9 or 18W, tungsten, wedge base		
		WP12V25W = 12V-25W, tungsten, D.C.B.		
		WP24V_W = 24V-9 or 18W, tungsten, wedge base		
		WP24V25W = 24V-25W, tungsten, D.C.B.		
		QWP6V_W = 6 V-8, 12 or 20W, halogen, quartz bi-pin		
		QWP12V_W = 12V-8, 12, 20 or *55W, halogen, quartz bi-pin		
		QWP24V_W = 24V-20 or *70W, halogen, quartz bi-pin		
		SBWP6V_W = 6V-9, 12, 18 or 25W, tungsten, sealed beam		
		SBWP12V_W = 12V-12, 18 or 25W, tungsten, sealed beam		
		QSBWP6V_W = 6V-8, 12 or 20W, halogen, quartz, sealed beam		
		QSBWP12V_W = 12V-8, 12 or 37W, halogen, quartz, sealed beam		
		WP32V_W = 32V-18 or 25W, tungsten, D.C.B.		
		WP120V_W = 120V-10 or 15W, tungsten, D.C.B.		
		Q120V35W = 120V-35W, halogen, DCB		
Q120V50W = 120V-50W, halogen, DCB**				
		*Only available in high temp heads		
		**Only available in metal heads		

EXAMPLE: RS10WP6V9W

Project / Location		Date
Contractor		Prepared by
LUMACELL Model		




RS*WP / RS*WPRB / RS*QWPBH

RS*WPRB



Dimensions

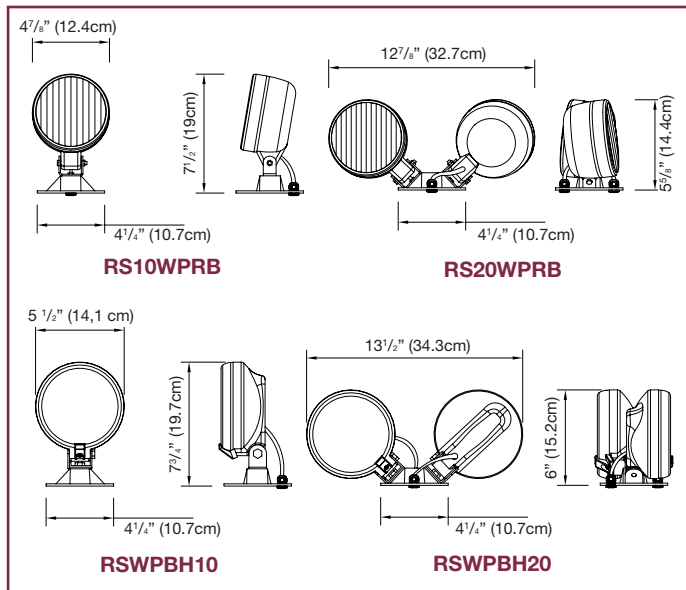

Features

- Sealed beam, PAR 36, surface-mounted, rubber coated industrial remote fixture
- For use in high pressure hose down areas
- Available only in black
- CSA certified to C22.2 N°50.

Replacement Lamps

Model	Lamp Type	Voltage-Wattage
550.0026-L	Tungsten	12V-12W
550.0027-L	Tungsten	12V-18W
550.0023-L	Tungsten	12V-25W
*580.0030-L	Halogen	12V-55W
*580.0031-L	Halogen	24V-70W

* Lamps for RS10QWPBH

See the complete list p. 196 to 199.

Ordering Information

Series	# of Heads	Voltage/Wattage/Lamp Type	Options
RS= PAR 36	10= single head	SBWPRB6V_W = 6V-9, 12, 18 or 25W, tungsten, sealed beam	Blank= no options
	20= double head	SBWPRB12V_W = 12V-12, 18 or 25W, tungsten, sealed beam	TC= teflon coated lens (RB only)
		QSBWPRB6V_W = 6V-8, 12 or 20W, halogen, quartz, sealed beam	
		QSBWPRB12V_W = 12V-8, 12 or 37W, halogen, quartz, sealed beam	
RS	10= single head	QWPBH24V70W = 24V-70W, halogen, quartz, H3	Blank= no options
	20= double head	QWPBH12V55W = 12V-55W, halogen, quartz, H3	
NOTE : " " insert wattage required			

EXAMPLE: RS10SBWPRB6V9W