



Q-BIC REMOTE Fixtures

Surface Mounted Series

PROJECT _____
 LOCATION _____
 DATE _____
 CONTRACTOR _____
 PREPARED BY _____
LUMACELL
 MODEL _____

RSQB/ RSQBS/ RSQB2


FEATURES

- Cubic, vandal-resistant surface-mounted fixture
- Single, double or twin cube with center body
- CSA certified to C22.2 No50.



DIMENSIONS

Dimensions are approximate and subject to change.

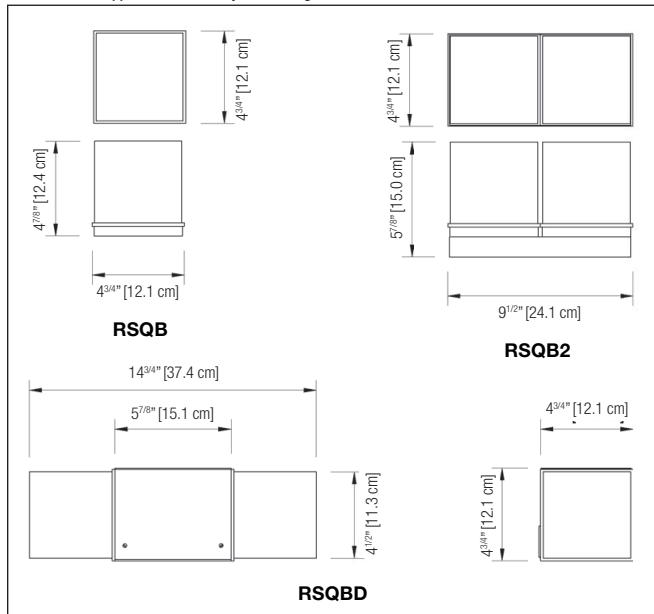

TYPICAL SPECIFICATIONS

Remote heads Series **Q-BIC** shall be comprised of one (single) or two (double or twin) 12-Watt adjustable heads with halogen lamps. Each lamp shall be housed in an impact-resistant polycarbonate cube. The cube lens shall be frosted to diffuse the light.

Heads shall provide mounting holes for installation to a standard octagonal box.

The remote unit shall be the **Lumacell** model:
 RSQ _____ X _____ .

WIRE GUARDS

460.0035-L	Wall Mount (RSQB)
460.0031-L	Wall Mount (RSQBD)
460.0032-L	Wall Mount (RSQB2)

REPLACEMENT LAMPS

MODEL	AC SPECS	DC SPECS
570.0016-L	Mini tungsten, wedge base	6V-9W
460.0031-LL	Mini Halogen (quartz), bi-pin	6V-12W
580.0079-L	MR16, flood	6V-10W

See the complete list p. 196 to 199.

IN THE SAME FAMILY:



- Q-BIC -
 Battery Unit

p.TBD

ORDERING INFORMATION

SERIES	NUMBER OF HEADS	VOLTAGE/WATTAGE/LAMP TYPE	COLOUR
RSQB = single cube RSQBD = double cube RSQB2 = twin cube	T6V9W = 6V-9W, tungsten, wedge base T12V9W = 12V-9W, tungsten, wedge base T12V18W = 12V-18W, tungsten, wedge base T24V9W = 24V-9W, tungsten, wedge base T24V18W = 24V-18W, tungsten, wedge base T32V15W = 32V-15W, tungsten, wedge base 6V8W = 6V-8W, quartz bi-pin 6V12W = 6V-12W, quartz bi-pin 12V8W = 12V-8W, quartz bi-pin 12V12W = 12V-12W, quartz bi-pins 12V20W = 12V-20W, quartz bi-pins 24V20W = 24V-20W, quartz bi-pins 120V20W = 120V-20W, GU10 120V35W = 120V-35W, GU10 M6V6W = 6V-6W, MR16 M6V10W = 6V-10W, MR16 M12V12W = 12V-12W, MR16 M12V20W = 12V-20W, MR16 M12V35W = 12V-35W, MR16 M12V50W = 12V-50W, MR16 M24V20W = 24V-20W, MR16 M24V35W = 24V-35W, MR16 M24V50W = 24V-50W, MR16	Blank = factory white BK = black	Blank = no options TP = tamper proof screws *690.0454-L = tamper proof bit *One bit needed per order.

EXAMPLE: RSQBT6V9W