



# MT/ MQ/ MQM Series REMOTE Fixtures

Micro tungsten lamps, micro-quartz lamps or MR16 lamps

PROJECT \_\_\_\_\_  
 LOCATION \_\_\_\_\_  
 DATE \_\_\_\_\_  
 CONTRACTOR \_\_\_\_\_  
 PREPARED BY \_\_\_\_\_  
 LUMACELL  
 MODEL \_\_\_\_\_


## MT/ MQ/ MQM SERIES

### FEATURES

- Compact design
- 6, 12 and 24 volts with various wattages
- Variable light patterns using adjustable lens
- Fire-retardant thermoplastic
- Available with tungsten, quartz lamps or MR16
- 300o rotation
- CSA certified to C22.2 No 50



### DIMENSIONS

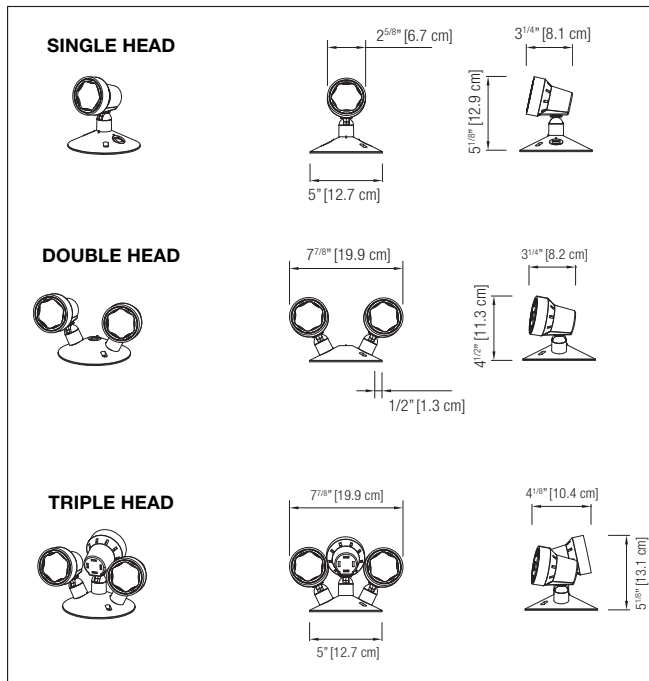

### TYPICAL SPECIFICATIONS

Lamp head and stem shall be injection molded, impact resistant, flame retardant thermoplastic and shall require no tool for aiming or adjustment. The lens shall be inverse concave design and fully adjustable for aisle or area distribution during installation without the need to energize the lamp. Visual identification of distribution shall be provided through position of adjustment pins.

Fixture shall be supplied with a canopy for installation on any four inch octagon box. Housing shall be so designed to allow for lamp replacement if required.

The remote unit shall be the **Lumacell** model: RS \_\_\_\_\_.

### WIRE GUARDS

460.0029-L	Wall Mount
------------	------------

### REPLACEMENT LAMPS

MODEL	AC SPECS	DC SPECS
570.0016-L	Tungsten	6V-9W
570.0045-L	Tungsten	24V-9W
570.0015-L	Halogen (quartz)	12V-12W

See the complete list p. 196 to 199.

### ORDERING INFORMATION

SERIES	LAMP TYPE	NUMBER OF HEADS	VOLTAGE/WATTAGE/LAMP TYPE	OPTIONS
M= micro, PAR 18	T= tungsten, wedge base Q= halogen, quartz bi-pin QM= halogen, MR16	1= single head 2= double head 3= triple head	6V9W= 6V-9W, wedge base 12V9W= 12V-9W, wedge base 12V18W= 12V-18W, wedge base 24V9W= 24V-9W, wedge base 24V18W= 24V-18W, wedge base 6V8W= 6V-8W, quartz bi-pin 6V12W= 6V-12W, quartz bi-pin 12V8W= 12V-8W, quartz bi-pin 12V12W= 12V-12W, quartz bi-pin 6V6W= 6V-6W, MR16 6V10W= 6V-10W, MR16 12V12W= 12V-12W, MR16 12V20W= 12V-20W, MR16 24V12W= 24V-12W, MR16 24V20W= 24V-20W, MR16 LD7= 12V4W LED MR16	Blank= factory white BK= black

EXAMPLE: MT16V9W