


Project / Location		Date
Contractor		Prepared by
LUMACELL Model		



DIVIDER® / RS22

RS22

Dimensions

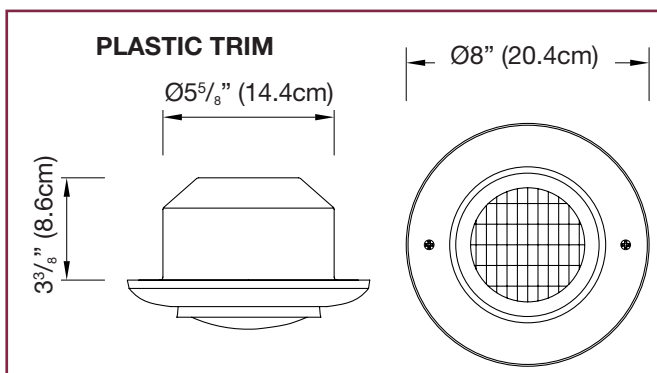

Wire Guard

460.0033-L	Wall Mount
------------	------------

Ordering Information

Series	Voltage/Wattage/Lamp Type	Colour	Options
RS22 = par 36 recessed with plastic trim	6V9W = 6V-9W, tungsten, wedge base	Blank = factory white BK = black	Blank = no options M = metal trim
	6V_W = 6V-18 or 25W, tungsten, DCB		
	12V_W = 12V-9 ou 18W, tungstène, wedge base		
	24V, 12V25W = 12V, 24V-25W, tungsten, DCB		
	24 V_W = 24V-9 or 18W, tungsten, wedge base		
	24 V_25W = 24V-25W, tungsten, DCB		
	Q6V_W = 6V-8, 12 or 20W, halogen, quartz bi-pin		
	Q12V_W = 12V-8, 12, 20 or *55W, halogen, quartz bi-pin		
	Q24V_W = 24V-20 or *70W, halogen, quartz bi-pin		
	QSB6V_W = 6V-8, 12 or 20W, halogen, quartz sealed beam		
	QSB12V_W = 12V-8 or 37W, halogen, quartz sealed beam		
	SB6V_W = 6V-9, 12, 18 or 25W, tungsten, sealed beam		
	SB12V_W = 12 V-12, 18 or 25W, tungsten, sealed beam		
	32V_W = 32V-18 or 25W, tungsten, DCB		
	120V_W = 120V-10, 15W, tungsten, DCB		
	Q120V35W = 120V-35W, halogen, DCB		
	Q120V50W = 120V-50W, halogen, DCB*		
* Available with metal trim only. NOTE : "___" insert wattage required Other types available, consult your sales representative			

See the complete list p. 196 to 199.

Features

- PAR 36, recess mounted fixtures with gimbal ring
- Durable thermoplastic trim ring standard; metal trim available as an option
- Gimbal ring adjustable on two planes to 45°
- No extra housing needed
- CSA certified to C22.2 N°50.



Replacement Lamps

Model	Lamp Type	Voltage-Wattage
570.0016-L	Tungsten	6V-9W
570.0025-L	Tungsten	12V-9W
570.0045-L	Tungsten	24V-9W

EXAMPLE: RS226V9W